

	Cage Code:	Title:	Date:	Rev:	Model no:
	02WLO	PRODUCT DATA (Subject to Change)	12/2/2009	None	H22-065

This document describes the performance of a high power 1P2T switch. This is a cold switched design i. e; switched while RF is off. Proper bias levels per item no.11 must be applied when operating this device.

ITEM NO	CHARACTERISTIC	CONDITIONS	MIN	MAX	UNITS	COMMENTS
1	POWER SPECIFICATION	IN BAND				
1.1	FREQUENCY		2.00	4.00	GHz	
1.2	PEAK POWER		--	2000	WATTS	
1.3	PULSE WIDTH		--	10	μs	
1.4	DUTY		--	4	%	
1.5	AVERAGE POWER		--	80	WATTS	
1.6	CW POWER		--	80	WATTS	
2	POWER SPECIFICATION	GUARD BAND				
2.1	FREQUENCY		4.00	4.50	GHz	
2.2	PEAK POWER		--	20	WATTS	
2.3	PULSE WIDTH		--	10	μs	
2.4	DUTY		--	5	%	
2.5	AVERAGE POWER		--	1	WATTS	
2.6	CW POWER		--	1	WATTS	
3	POWER SPECIFICATION	OUT OF BAND				
3.1	FREQUENCY		>4.50	--	GHz	
3.2	PEAK POWER		--	0.03	WATTS	
3.3	PULSE WIDTH		CW	--	μs	
3.4	DUTY		CW	--	%	
3.5	AVERAGE POWER		--	--	WATTS	
3.6	CW POWER		--	0.03	WATTS	
4	OPERATING FREQUENCY		2.00	4.00	GHz	
5	INSERTION LOSS					
5.1			--	1.35	dB	
6	ISOLATION					
6.1	INPUT TO OUTPUT		60		dB	

	Cage Code:	Title:	Date:	Rev:	Model no:
	02WLO	PRODUCT DATA (Subject to Change)	12/2/2009	None	H22-065

This document describes the performance of a high power 1P2T switch. This is a cold switched design i. e; switched while RF is off. Proper bias levels per item no.11 must be applied when operating this device.


ITEM NO	CHARACTERISTIC	CONDITIONS	MIN	MAX	UNITS	COMMENTS
6.2	OUTPUT TO OUTPUT		60		dB	
7	PHASE SPECIFICATION					
7.1	MATCHING		--	--	DEG	NOT SPECIFIED
7.2	PHASE TRACKING		--	--	DEG	NOT SPECIFIED
8	VSWR					
8.1	INPUT & OUTPUT	SELECTED PORTS	---	1.8:1	--	
8.2	PORTS NOT SELECTED		--	--	--	INFINITY
8.3	TERMINATION		---	2.0:1	--	
8.4	SOURCE		---	1.2:1	--	
9	HARMONICS & SPURS					
9.1	INTERNALLY GENERATED		--	--	dBc	NOT SPECIFIED
9.2		MEASURED AT INCIDENT POWER	--	0	WATTS	
10	SWITCHING SPECIFICATIONS					
10.1	SWITCHING SPEED	50% LOGIC TO 90% RF	--	1	μs	
10.2	SWITCHING RATE		--	100	kHz	
10.3	VIDEO LEAKAGE		--	--	Vpp	NOT SPECIFIED
10.4	COMMAND LOGIC TYPE					RS-422
10.5	LOGIC TABLE					SEE DWG 2598
11	D.C. SPECIFICATIONS					
11.1	POSITIVE BIAS VOLTAGE		4.5	5.5	V	
11.2	NEGATIVE BIAS VOLTAGE		-66	-74	V	
11.3	POSITIVE BIAS CURRENT		--	300	mA	
11.4	NEGATIVE BIAS CURRENT		--	60	mA	
11.5	NOTE: No over-voltage or reverse polarity protection is provided in this switch.					
12	CONNECTORS & INTERFACE					
12.1	RF					SMA(F)
12.2	DC					DEM-9
13	MECHANICAL					
13.1	WEIGHT		--	8	OZ	
13.2	SIZE		--	--	--	SEE DWG 2598
13.3	FINISH		--	--	--	SEE DWG 2598
14	ENVIROMENTAL					



Cage Code: 02WLO	Title: PRODUCT DATA (Subject to Change)	Date: 12/2/2009	Rev: None	Model no: H22-065
----------------------------	---	---------------------------	---------------------	-----------------------------

This document describes the performance of a high power 1P2T switch. This is a cold switched design i. e; switched while RF is off. Proper bias levels per item no.11 must be applied when operating this device.

14.1	OPERATING TEMPERATURE		-20	+55	C	
14.2	STORAGE TEMPERATURE		-20	+70	C	
ITEM NO	CHARACTERISTIC	CONDITIONS	MIN	MAX	UNITS	COMMENTS
14.3	VIBRATION LEVEL					GND TRANSPORT
14.4	DEVICE SCREENING	LEVEL 1				SCREENING PER HILL ENGINEERING QUALITY PROCEDURE 121

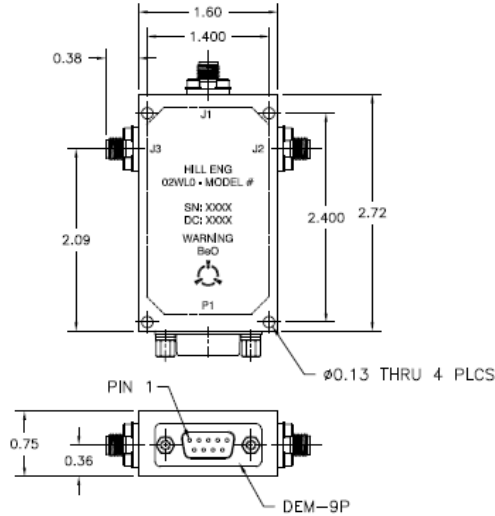

REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE ECN #359	11/20/97	SPL
A	REVISED PER ECN #416	1/26/98	JCH
B	REVISED PER ECN #500	8/24/98	SPL
C	REVISED PER ECN #1124	10/8/98	SPL
D	REVISED PER ECN #1327 (dyb)	2/18/2000	SPL
E	REVISED PER ECN #1537 (DL)	6/8/2000	SPL

HEATSINK/MOUNTING SURFACE FREE OF PAINT SEE NOTE 1d

PIN	SIGNAL
1	+5V
2	-V
3	GND
4	J2 SENSE (TTL)
5	J3 SENSE (TTL)
6	GND
7	LOGIC + (RS-422)
8	LOGIC - (RS-422)
9	GND

- NOTES:
1. FINISH
 - 1a. PAINT PER HILL MEI-105
 - 1b. PRIMER: ZINC COATING (ZRC) HILL P/N 172-0003
 - 1c. PAINT: FLAT BLACK EPOXY ENAMEL, P/N 172-0002
 - 1d. HEATSINK/MOUNTING SURFACE SILVER PLATE PER QQ-S-365.
 2. MARKING
 - 2a. MARKING: 0.09" HIGH BLACK CHARACTERS
 - 2b. LABEL: METALIZED POLYESTER SHEET P/N 127-0010

OUTPUT	LOGIC+	LOGIC-	J2 SENSE	J3 SENSE
J1-J2	0	1	1	0
J1-J3	1	0	0	1

HILL (MILITARY USE ONLY) SPECIFIED AND TO BE USED PARTS LIST 21/94 21/94 21/94 21/94 REMOVE ALL SURS FROM PARTS		APPROVALS DESIGNED BY SP LEROUX 11/20/97 CHECKED BY SPL 8/25/98 DATE 11/20/97 MANUFACTURED BY J WARD 11/20/97 CUSTOMER APPROVALS	DATE 11/20/97 8/25/98 11/20/97 11/20/97	
MATERIAL FRFR		DRAWING TITLE OUTLINE, SPDT, BALANCED LOGIC, SMAF		
NEXT ASSY	USED ON	SCALE	1/1	P/N 02WLO DRAWING NO. 2598 REV E
APPLICATIONS		DO NOT SCALE DRAWING	FILENAME: 2598E	SHEET 1 OF 1